

# Keep Sump Clean

## Mechanical Oil Skimmers: Sidewinder™ Tube Skimmer, Belt Skimmer, Disk Skimmers

### Sidewinder Tube Skimmer Skims from Anywhere

Skims underneath conveyors, enclosed sumps, and hard-to-access areas

Also works on oil spills

Pick the reach you need: reach sizes available from the standard 8" model up to 95"

Installs in seconds


Industrial-grade pick-up tubing uses ceramic scraper

Large oil discharge port

Continuous-duty motor

One year warranty

Recommended accessory: Zebra Diverter™ (see page 10 for details)

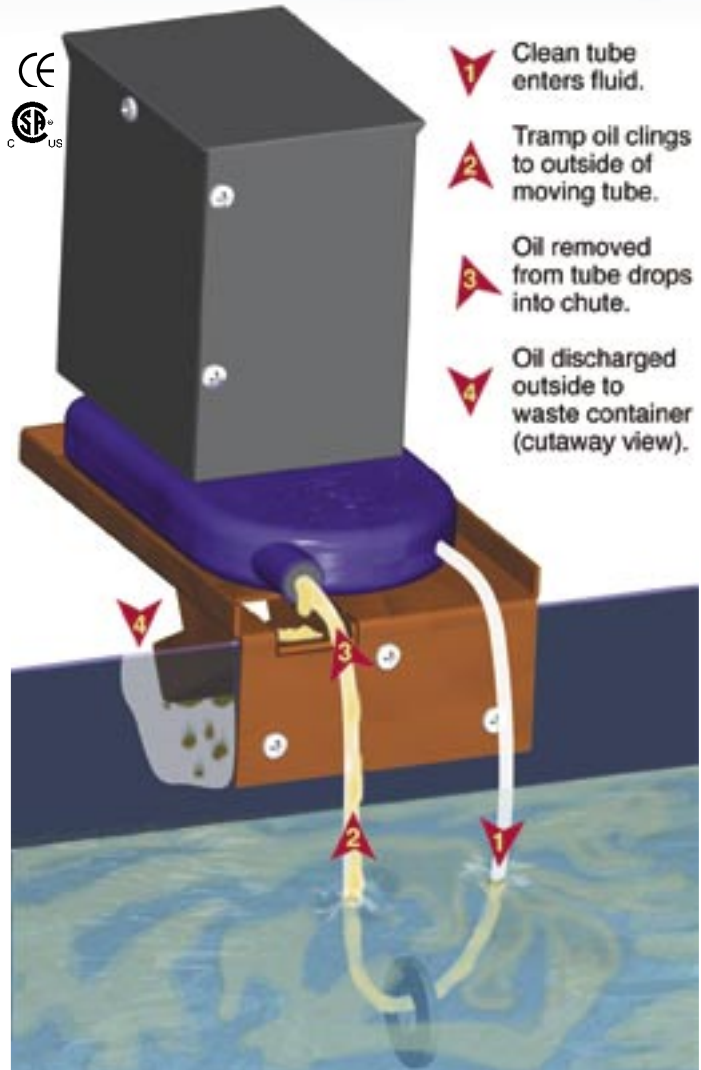

### Zebra Belt Skimmer is a Traditional Favorite

Steel, heavy-duty, rugged construction

Removable, easy-to-clean collection tray

Self-tensioning belt on fixed lower pulley


Dual wiper set with lifetime warranty

Continuous-duty, fan-cooled motor

2" diameter minimum access required

One year warranty (except on steel belts)

Recommended accessory: Zebra Diverter™ (see page 10 for details)

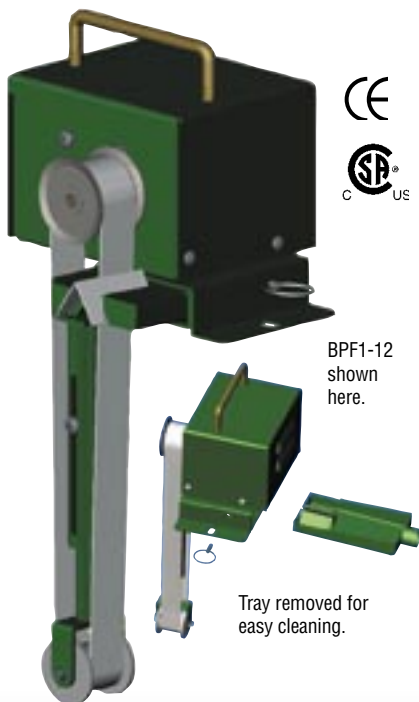

### Search No More

For a replacement belt for your belt skimmer!

Zebra offers belts in stainless steel and cogged or flat polyurethane. All we need to know from you is the required OAL and width. [Contact us](#) today for a quote.



## Smart Disk Skimmer Saves You Time & Money



Saves you nearly \$300 per year over Simple Disk Skimmers

Integrated Diverter™ knows the difference between floating tramp oils and coolant

Continuous-duty, fan cooled motor

Rugged steel construction

Lifetime warranty on disk and wipers, one year on all other parts

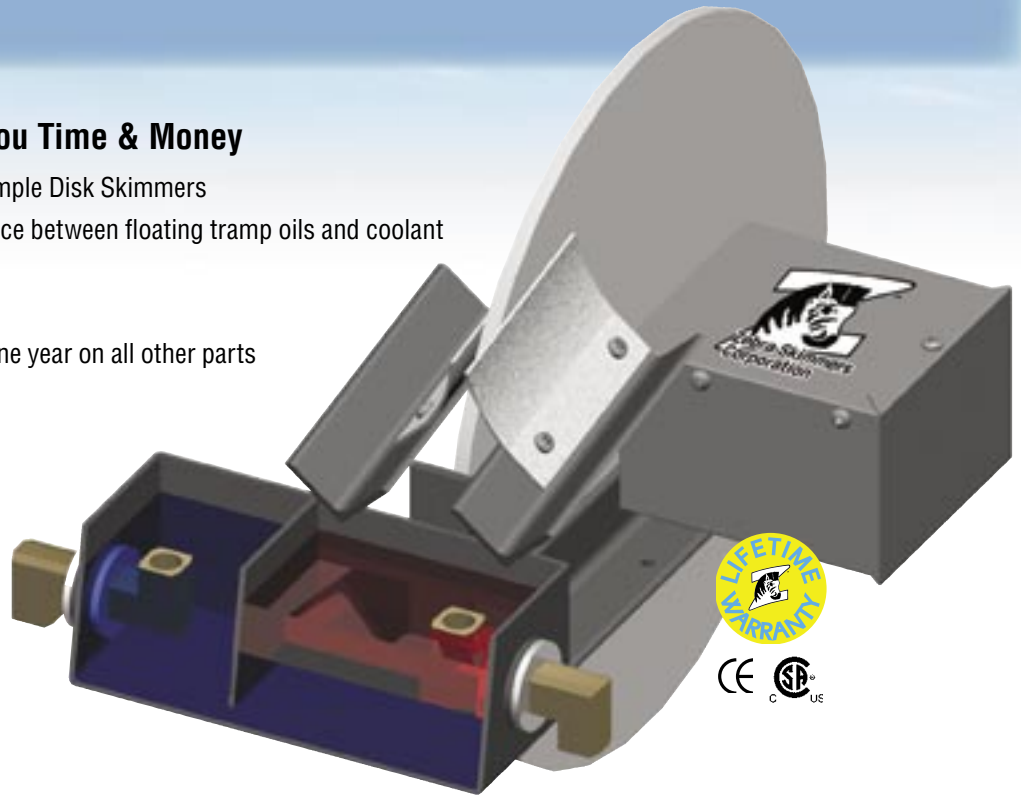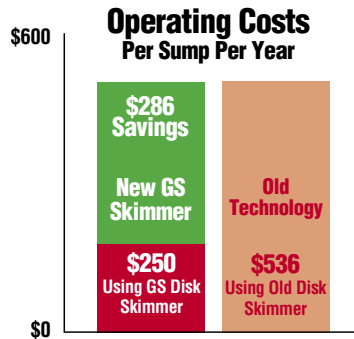

Smart Disk Skimmer with Diverter (see how Diverter works on page 10)

## Simple Disk Skimmer Tackles Heavy Oil Loads

Handles heavy oil loads from coolant and wash water applications

Regular-duty motor

One year warranty (lifetime on disk and wipers)

Recommended accessory: Timer (part# XETIMER)

For a continuous-duty unit or for coolant-free oil output, refer to the Smart Disk Skimmer.



Timer for mechanical skimmers (#XETIMER)

## Selection Guide

Model	Part Number	Access	Reach <sup>1</sup>	Capacity	Max. Temp.	Application	Material <sup>2</sup>	Motor <sup>3</sup>
<b>Sidewinder Tube Skimmer (ZVA7 Series)</b>	ZVA7-08	1/2" x 3"	8"	1 qt/hr	90°F (30°C)	Coolant	Polyvinyl	100-120v, 50/60 Hz
	ZVA7-11	1/2" x 3"	11"	1 qt/hr	90°F (30°C)	Coolant	Polyvinyl	100-120v, 50/60 Hz
	ZVA7-14	1/2" x 3"	14"	1 qt/hr	90°F (30°C)	Coolant	Polyvinyl	100-120v, 50/60 Hz
<b>Belt Skimmer (B Series)</b>	BPF1-08	2" dia.	8"	1 gal/hr	80°F (27°C)	Coolant	Polyvinyl	115v, 60 Hz
	BPF1-12	2" dia.	12"	1 gal/hr	80°F (27°C)	Coolant	Polyvinyl	115v, 60 Hz
	BPF1-18	2" dia.	18"	1 gal/hr	80°F (27°C)	Coolant	Polyvinyl	115v, 60 Hz
	BPF1-24	2" dia.	24"	1 gal/hr	80°F (27°C)	Coolant	Polyvinyl	115v, 60 Hz
	BSF1-08	2" dia.	8"	1 gal/hr	212°F (100°C)	Wash Water	Stainless	115v, 60 Hz
	BSF1-12	2" dia.	12"	1 gal/hr	212°F (100°C)	Wash Water	Stainless	115v, 60 Hz
	BSF1-18	2" dia.	18"	1 gal/hr	212°F (100°C)	Wash Water	Stainless	115v, 60 Hz
<b>Smart Disk Skimmer (GS Series)</b>	GS4H300	1" x 12"	4.5"	2 qt/hr	80°F (27°C)	Coolant	High Impact	115v, 60 Hz
	GS4H460	1" x 18"	7.0"	2 qt/hr	80°F (27°C)	Coolant	High Impact	115v, 60 Hz
	GS4H610	1" x 24"	9.5"	2 qt/hr	80°F (27°C)	Coolant	High Impact	115v, 60 Hz
<b>Simple Disk Skimmer (L Series)</b>	LH300	1" x 12"	4.5"	1 gal/hr	80°F (27°C)	Coolant	High Impact	115v, 60 Hz
	LH460	1" x 18"	7.0"	1 gal/hr	80°F (27°C)	Coolant	High Impact	115v, 60 Hz
	LH610	1" x 24"	9.5"	1 gal/hr	80°F (27°C)	Coolant	High Impact	115v, 60 Hz
	LW300	1" x 12"	4.5"	1 gal/hr	212°F (100°C)	Wash Water	High Temp	115v, 60 Hz
	LW460	1" x 18"	7.0"	1 gal/hr	212°F (100°C)	Wash Water	High Temp	115v, 60 Hz
	LW610	1" x 24"	9.5"	1 gal/hr	212°F (100°C)	Wash Water	High Temp	115v, 60 Hz
<b>Skimmer Accessories</b>	BGST4	Diverter, Oil/Coolant Separator for Zebra Sidewinder and Belt Skimmers						
	BGX1	Lockjaw Mounting Clamp for Zebra Sidewinder with Diverter and Belt Skimmers with or without Diverter						
	XETIMER	Timer for mechanical skimmers, 24 hour, 3 setting						

**Notations**  
<sup>1</sup>Customized Sidewinder reaches are available by changing the suffix number, in increments of 3", to a maximum of 95". Longer reach belt skimmers are available, please call for quote.  
<sup>2</sup>Warranties: Lifetime on all disk types, 1 year on polyvinyl tubes and belts, 30 days on stainless belts  
<sup>3</sup>220v, 50 Hz models available by adding "E" to the end of the part number

# Keep Sump Clean

Zebra Diverter™ for Coolant/Oil Separation, LockJaw™ Mounts Skimmer Anywhere


## Zebra Diverter Knows Its Stuff

- Separates oils for coolant-free skimmer output
- Mounts below Zebra Belt Skimmer & Sidewinder
- Rugged, heavy-duty, steel construction
- Brass outlet fittings
- Discharge pipes and mounting hardware included



## How the Diverter Works

- 1 Oils (tramp and coolant) enter here
- 2 Coolant sinks and passes under this weir
- 3 Clean coolant returns to your sump here
- 4 Tramp oils discharge to waste container here

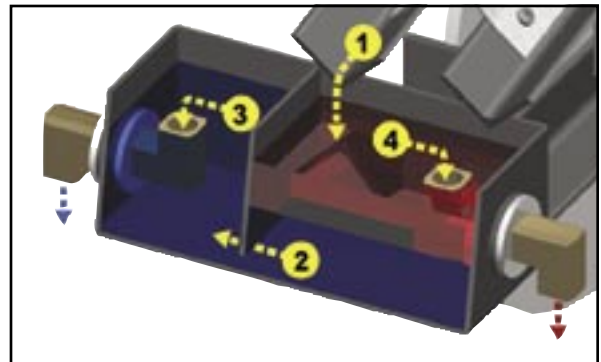

Shown here integrated with Zebra Smart Disk Skimmer.

## LockJaw Makes Installation A Snap

- Install your skimmer in seconds!
- Easiest way to transport your skimmer between machines or to drums
- Mounts below mechanical skimmers
- Fits easily on drums, pails, and sump walls of 1/4" or less



Belt Skimmer, Diverter, and LockJaw.



Closeup view shows clamping mechanism.



Timer for mechanical skimmers (#XETIMER)

## Selection Guide

Model	Part Number	Description	Application	Dimensions (L, W, H)
Diverter	BGST4	Mini Gravity Oil/Water Separator	Belt Skimmer/Sidewinder	7" x 3" x 2.5" (178 x 76 x 64mm)
LockJaw	BGX1	Lockjaw Mounting Clamp	Belt Skimmer w/ or w/o Diverter Sidewinder with Diverter only	9" x 4" x 2.5" (229 x 102 x 64mm)
Timer	XETIMER	Timer for Mechanical Skimmers	Any Mechanical Skimmer	24 hour, 3 setting